


You want to do your part. We can help.

© Edgetech IG 2008 • #MUVH • rev. 2009 02



The all-foam formula of Super Spacer® is proven to be less conductive, blocking heat from escaping or entering through the glass edge, providing optimal thermal performance and the lowest U-Value in the industry.

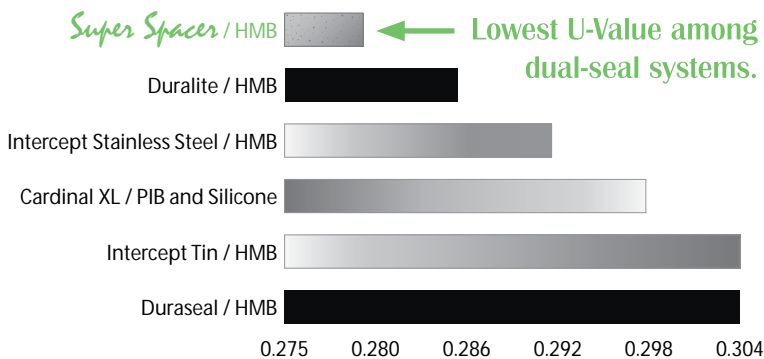

Simulations performed by Enermodal Engineering Ltd. Using Window 5.2 and Therm 5.2 as per NFRC 100, and NFRC 500. Outside temperature 0° F, inside temperature 70° F. Low-e glass Cardinal Low-e2 272. Air spaces .500" wide, 90% argon II. IGU's 24" x 48". Super Spacer® is a registered trademark of Edgetech I.G. Inc. Duralite™ and Duraseal® are trademarks of TruSeal Technologies, Inc. Intercept® is a registered trademark of PPG Industries. XL Edge™ is a trademark of Cardinal Glass Industries.

- Optimized energy savings
- Enhanced environmental comfort and health near windows
- Condensation and mold resistance like no other spacer
- Extreme durability for sustainable performance

Super Spacer®  
**SustainaView®**  
 Window Technology

LEARN MORE AT  
[energystar.gov](http://energystar.gov)

[www.sustainaview.com](http://www.sustainaview.com)

